

AMPLIFIER

Two channel



Series OA 727

The OA 727 is applicable with all transmitters/ receivers operating with separate amplifiers.

- 11-pin plug-in module
- LED indication of amplifier activation
- Two separate amplifier units which are consequently independent of each other
- Relay output 250VAC, 5A
- Light/dark function
- Output invertible
- Eliminates fault pulses

Technical data

Supply options: 230V, 115V, 024VAC, $\pm 10\%$ 45-65Hz
024V, 012VAC/DC +15% -20%

Power consumption: approx. 2,8VA

Output: -Relay: single pole changeover 250VAC, 8A

Modulation Frequency: approx. 7,5KHz

Response time: Typ. 25msec.


Ambient temperature: - 20°C to + 55°C

Housing: 11-pin plug-in Noryl

Gain control: Allows 10:1 change

Weight: max 190 g

Wiring diagram

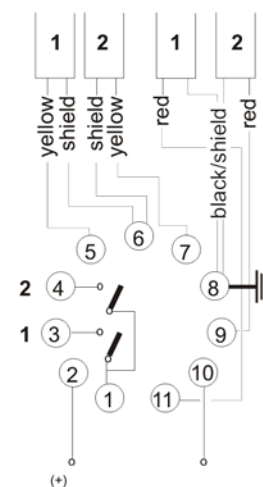

Type no. Identification code

Type no.	Identification code
014000	OA 727 230VAC relay output
014010	OA 727 115VAC relay output
014020	OA 727 048VAC relay output
014040	OA 727 024VAC relay output
014050	OA 727 024VAC/DC relay output
014070	OA 727 012VAC/DC relay output

Dimension (mm)

